


# EPDM ROOFING WHITE ON BLACK MEMBRANE

Technorubber EPDM roofing membrane (white on black) is single-ply synthetic rubber membrane made of Ethylene Propylene Diene Monomer (EPDM). It is manufactured conveyed to the calendar extruder into large sheets and vulcanized. This EPDM membrane is available in panel sizes up to 12.2 m wide x 30.5 m long, resulting in fewer field seams and a shorter installation time.

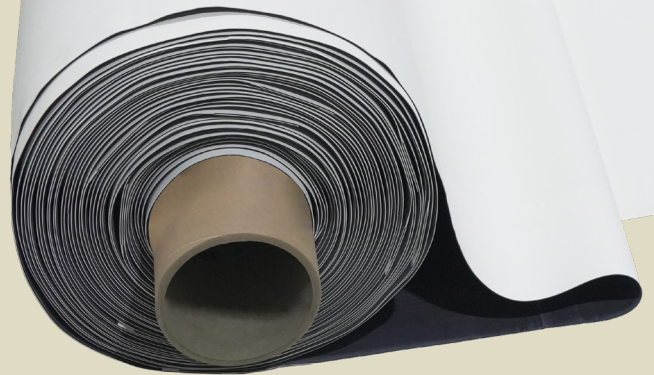

## FEATURES

### Superior Quality Of Technorubber Fleeceback

Durability: robust membrane, dimensionally stable enabling to withstand severe weather conditions encountered in our regions. EPDM is a fully cured membrane that mainly contains EPDM polymer and white fillers, offering unmatched resistance to ozone and UV Radiation. The SRI value is closer to 100 making it a perfect solution for cool rooftops and energy saving projects.

This membrane has no plasticizer resulting in a stable and inert membrane. It offers an extremely durable roofing solution. Technorubber EPDM remains flexible even at very low temperature (-45°C) and can elongate over 300% to accommodate building movements and temperature fluctuations.

### Installation Speed

Large EPDM seamless sheets enable prompt installation. The benefit is simple for both new roofing and refurbishment. A perfect and aesthetic surface after installation.

### Even Faster With The Seam Tape

Field splicing are made with a Primer and a self-adhesive tape. It tremendously improves speed, reliability and consistency of the seams.

### A Perfect Combination

This membrane is designed to save installation time without compromising in any way. A high-quality and durable roofing system. The Technorubber EPDM roofing membrane offers such a unique combination of features and long-term benefits.

### Technorubber Roofing Systems

We can propose an EPDM rubber roofing system and accessories for all kind of roofing systems: Fully Adhered & Mechanically Attached Systems. All this for both re-roofing and/or new construction projects.

### A Green Choice

Technorubber EPDM is an inert material with limited environmental impact during manufacturing, installation and use. No toxic substances are released from the membrane, allowing collection and use of run-off rainwater. These ecological benefits, in combination with the membrane's life expectancy of up to 50 years, make Technorubber EPDM an environmentally friendly roofing solution.

### Combined With Quality Manufacturing

Technorubber operates plants with state-of-the-art equipment. The EPDM plants in Dammam, KSA have achieved ISO 9001:2015 which is a testimony to the company's commitment to quality management systems. Technorubber EPDM membranes is in accordance with EN 13956. This certifies that these products and associated production methods are meeting today's requirements in terms of mechanical resistance and stability, safety in case of fire, hygiene, health and environmental protection, safety in use, protection against noise, energy economy and heat retention, aspects of durability, serviceability and identification.

## TECHNICAL SPECIFICATIONS

NO.	Property	Unit	Testing Standard	Specifications
01	Length	m	EN 1848-2	-0% ,+5%
02	Width	m	EN 1848-2	-0.5% ,+1%
03	Effective Thickness	mm	EN 1849-2	-5%,+10%
04	Mass per unit area	Kg/m <sup>2</sup>	EN 1849-2	-5% ,+10%
05	Joint Peel resistance	N/50mm	EN 12316-2	≥ 25
06	Joint Shear resistance	N/50mm	EN 12317-2	≥ 150
07	Tensile strength	N/mm <sup>2</sup>	EN 12311-2	≥ 8.0
08	Elongation at break	%	EN 12311-2	≥300
09	Resistance to impact Load-Hard substrate	mm	EN 12691(A)	≥ 200
10	Resistance to Static Load-Hard substrate	Kg	EN 12730(B)	≥ 10
11	Tear resistance	N	EN 12310-2	≥ 25
12	Dimensional Stability	%	EN 1107-2	± 0.5
13	Reaction to Fire	-	EN 13501-1	Class E
14	External Fire Performance *	-	EN 13501-5	F Roof
15	Foldability at low temp	°C	EN 495-5	≤ -45
16	UV Exposure	-	EN 1297	Pass
17	Water tightness	-	EN 1928 (B)	Pass
18	Resistance to Ozone	-	EN 1844	Pass
19	Solar reflectance	-	ASTM C1549	0.80
20	Thermal emittance	-	ASTM C1371	0.90
21	Solar reflectance index (SRI)	-	ASTM E1980	101

\*According to EN 13956, the product classification under EN 13501-5 is limited to Class F. Nevertheless, B roof(t1) and B roof(t4) classifications can be achieved for the complete assembly.

Technical Specification: EN 13956 (Flexible sheets for waterproofing—rubber sheets for roof waterproofing — Definitions and characteristics

## PRODUCT RANGE

NO.	Length	Width	Thickness
01	Up to 30.5m	1.50 – 12.20m	1.52, & 2.30mm

## WAREHOUSING AND INSTALLATION RECOMMANDATIONS

### Preparation

Allow the EPDM membrane to relax for approximately 30 minutes before installation.

### Application

Install EPDM membrane in accordance with the current specifications and details. Contact with oils, petroleum, bitumen & grease must be avoided.

### Substrate

Roofing structure needs to be stable enough to support the temporary loading. Substrate needs to be clean, smooth, dry and free of sharp edges.

### Storage

Store EPDM membrane in hot dry place until use.